

NOTES

- Please read tis entire manual to fully understand and safely use the luminaire.
- The products can be used at the voltage of 100-277VAC, 50/60Hz, suitable for indoor and outdoor, moisture-proof and dust-proof.
- Specifications are subject to change without notice. Please visit kobielectric.com for the most recent installation instructions and specification sheets.

UNPACKING INSTRUCTIONS

1. Unpack and carefully examine the product.
2. Report any damage and save all packing material if any part(s) were damaged during shipping.
3. Do not attempt to use this luminaire if it is damaged.

INSTALLATION INSTRUCTIONS




- ⚠ WARNING**
- THE LUMINAIRE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN
 - THE PRODUCT SHOULD BE INSTALLED AND OPERATED BY A QUALIFIED ELECTRICIAN OR TECHNICIAN IN ACCORDANCE WITH RELEVANT LOCAL CODES
 - RISK OF ELECTRIC SHOCK. ENSURE THAT MAIN POWER SOURCE IS OFF WHEN WIRING OR SOLDERING THE SECTIONS OF THE PRODUCTS.

MAINTENANCE

1. Disconnect the product from the power supply prior to cleaning.
2. Use a dry or slightly moistened cloth for cleaning.
3. Never use any chemicals or abrasice materials for cleaning.

INSTALLATION INSTRUCTIONS

1. Use a screwdriver to loosen the screws and open the fixture. Disconnect the quick-connects that link the LED module to the driver and remove the front half of the fixture from the back plate by lifting and sliding from the hinge.
2. Drill holes through the back plate over mouting holes to mount it to the wall as needed.
3. Feed main power supply wires into back plate through the appropriate enclosure connectors and mount the bak plate to the wall, using sealant on all created openings.
4. Connect the input and ground wires of the driver to main power supply with appropriate wire connectors (SEE WIRING DIAGRAM). (Line)-Black (Neutral)-White (Ground)-Green Reattach the fixture front to the back plate by sliding down on the hinge.
5. Re-connect the LED module to the driver via quick-connect. Close fixture and re-tighten the housing screws.
6. If the visor is desired, remove (4) mounting screws with gaskets on the side of the fixture. Line up the visor with the holes, and re-insert the screws with gaskets and tighten screws (See below). Also, see end caps of the box for examples of the Wall Pack with visor mounted.
7. If connecting to dimmer controller, connect purple or blue wire from driver to positive (+) side and gray or white wire to negative (-) side of dimmer.
8. Use a sealing compound to fully fill the gap between the canopy and the mounting surface after installation of the fixture.

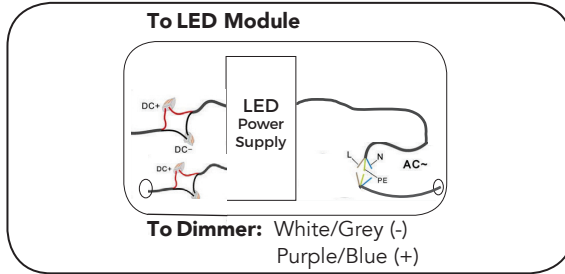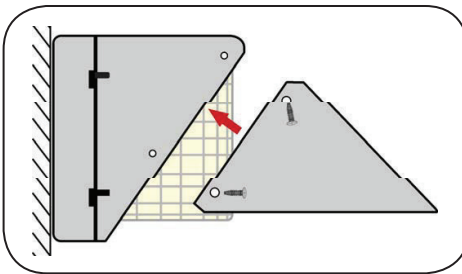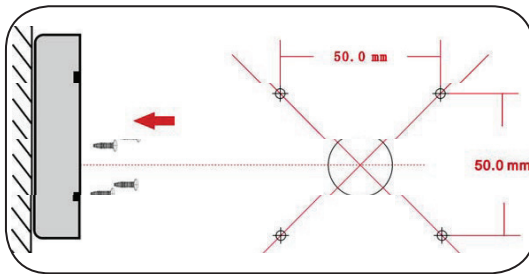

DIMMING DIAGRAMS

