

SER-485-IR Industrial Isolated Converter

N-Tron Networking Series



▶▶▶ Industrial Isolated Converter

The SER-485-IR is our premium Industrial RS-422/485 Isolated Repeater. Designed for rugged industrial environments, it is UL listed and certified for use in Class 1 Division 2 locations. Powerful Optical Isolation on both data ports protects your equipment and data from damaging ground loops and surges. Additional isolation on the power supply circuits adds a third degree of protection.

PRODUCT FEATURES

- Supports Data Rates up to 115.2 Kbps
- Extends Signal 4,000 feet (1200 Meters)
- Wide -40 to 80°C Temperature Range
- 10 to 48 VDC Input Power Range
- 2000 V 3-Way Optical Isolation
- UL Class 1 DIV 2 Listed
- Built-in, Switchable Termination & Bias

PRODUCT OVERVIEW

Packaged in a rugged ABS plastic case, this repeater operates in wide temperature extremes. With a 35mm DIN rail mounting bracket, the SER-485-IR is easy to integrate into your control panel or other industrial equipment.

Installation and configuration is easy with DIP switches to set up baud rate and serial communications mode. Removable terminal blocks make wiring a snap. Power is connected through separate terminal block that accepts 10 to 48 VDC from any external source.



Specifications

Serial Technology

RS-422	TD, RD, GND
RS-485 4-Wire	TDA(-), TD(B+), RDA(-), RDB(+)
RS-485 2-Wire	Data A(-), Data B(+)
Serial Connector	5 Position, Removable Terminal Block
Data Rate	2.4 to 115.2 kbps
Isolation	2KV RMS, 1 minute
Surge Protection	600 W Peak Power Dissipation Clamping time < 1 pico-second
Industrial Bus	MODBUS ASCII/RTU
Bias	Built-in, Switchable, 1.2KΩ XMT/RCV
Termination	Built-in, Switchable, 120Ω

Power

Source	External
Power Connector	2 Position Removable Terminal Block
Input Voltage	10 to 48 VDC (56 VDC max)
Power Consumption	0.5 W (Typical), 1.3 W (termination on both sides)
Power Supply Part #	NTPS 24-1.3

Terminal Blocks

Wire Size Accepted	28 to 12 AWG
Pitch	5.08 mm
Insulation Resistance	≥ 500 MΩ @ 500 VDC
Maximum Torque	5 Kg / cm

Indicators

Power	Red LED
Data	Red LED For Each Data Port

Mechanical


Dimensions	4.9 x 4.5 x 1.3 in (12.3 x 11.3 x 3.2 cm)
Enclosure	IP 20 Plastic, 35 mm DIN Mount
Weight	0.49 lbs (222 g)
MTBF	114696 hours
MTBF Calc. Method	Parts Count Reliability Prediction

Environmental

Op Temperature	- 40 to 80°C (-40 to 176°F)
Storage Temp	- 40 to 85°C (-40 to 185°F)
Op Humidity	0 to 95% Non-condensing
Regulatory Approvals	FCC, CE, UL UL Class 1 DIV 2 Groups A, B, C, D

industrial
networking

▶▶▶ SER-485-IR Specifications

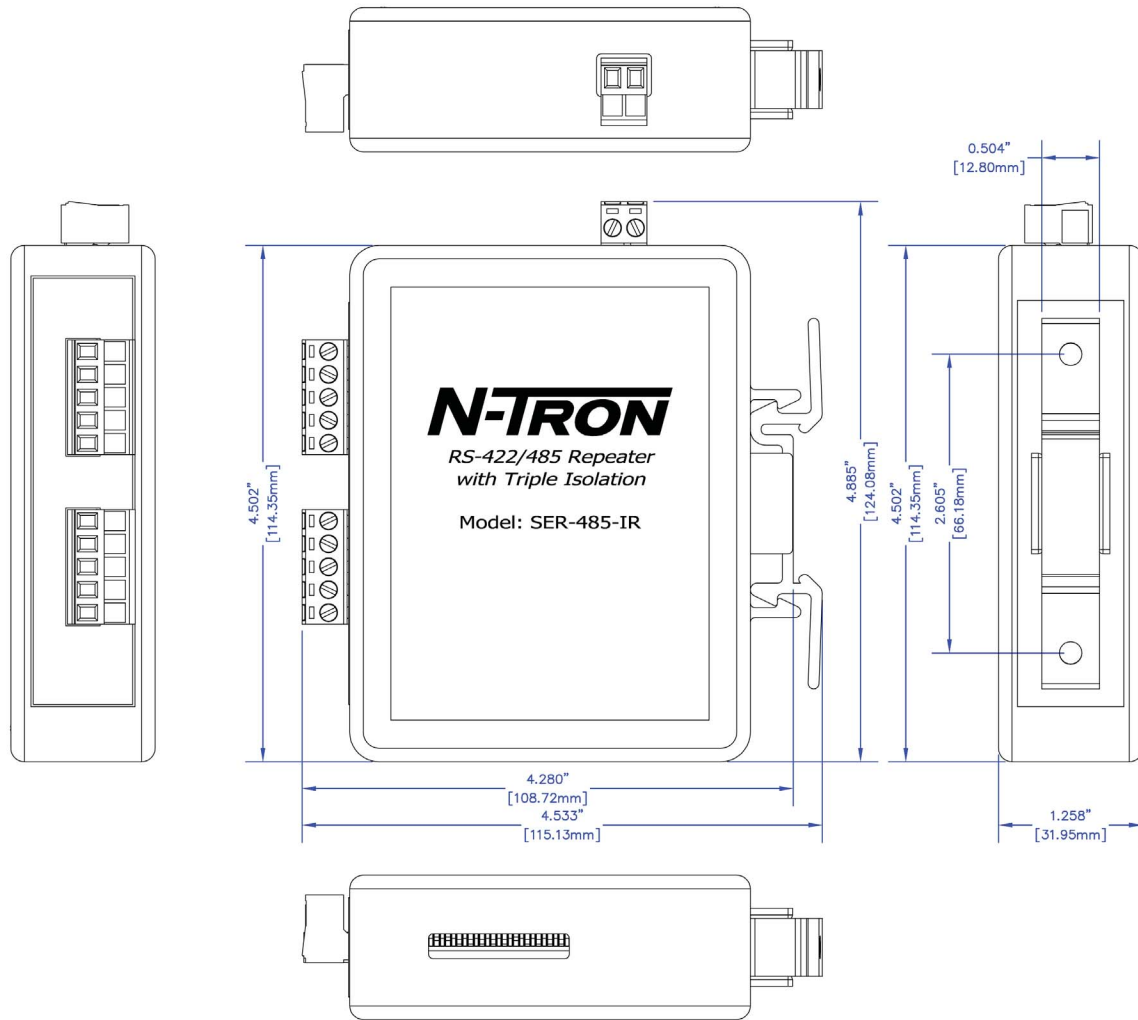

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

**Europe
Middle East
Africa**
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.

ADLD0238 070313 ©2013 Red Lion Controls