


### Applications


- Industrial Machinery
- Robotics
- Commercial Wiring
- Low Voltage Control System
- Solar Industry

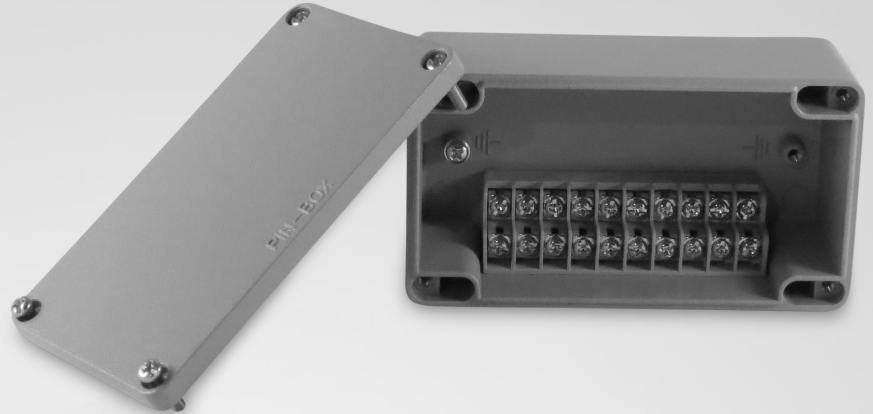

### Specifications


#### Mechanical

- Length: 2.755 in (70 mm)
- Width: 5.039 in (128 mm)
- Height: 2.047 in (52 mm)
- Weight: 0.88 lb (399 g)
- Material: Cast Aluminum  
Base & Cover
- Connection Capacity:  
14 - 20 AWG(0.5 - 2.5mm<sup>2</sup>)
- Neoprene Gasket In Cover

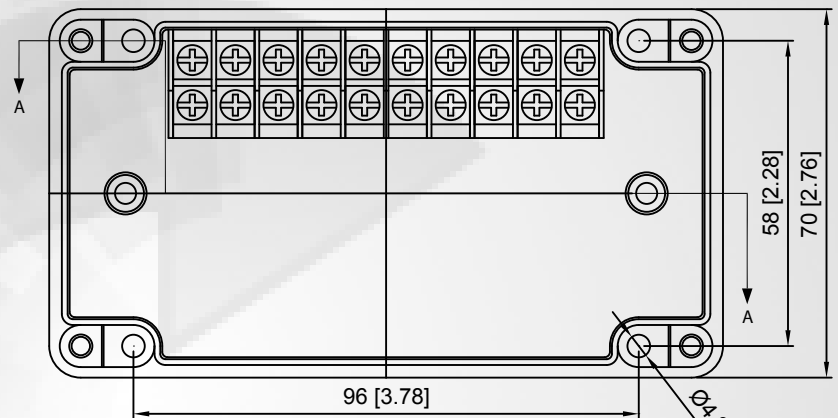

#### Electrical

- Input Current: 15 Amperes
- Rated Frequency: 60 Hz
- Rated Input Voltage: 120 Volts
- #6 Screw Terminal
- Terminations: 20 / Circuits: 10

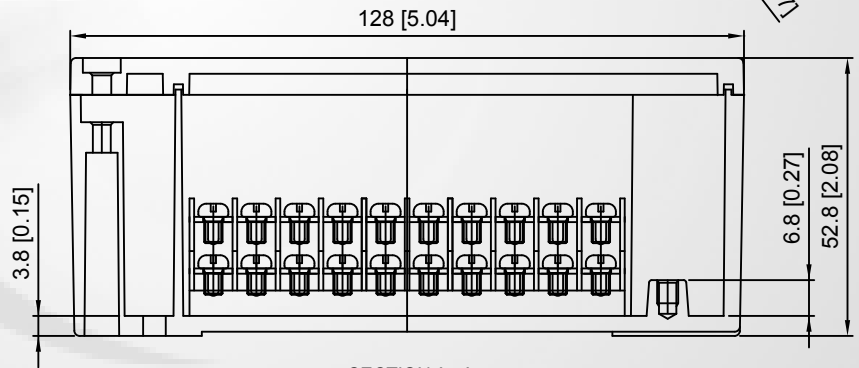

SECTION A - A  
SHOWN WITH COVER

#### Safety

- Certifying Agency: TUV-SUD
- Countries: Canada, USA
- Standards: UL 508A
- Ingress protection: IP67

### Compatible Accessory



SG-BB-10 (Red)