

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

## WARNINGS

- Risk of fire / electrical shock
- LED Fixture installation requires knowledge of luminaire electrical systems.
- Risk of electric shock – disconnect power at source before installation
- Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.
- If lamp or luminaire exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove lamp and contact us. For more information please visit [www.eurilighting.com](http://www.eurilighting.com) or call our toll-free number 1-888-743-5766.

## CAUTIONS

- Do not look directly at the operating LED Module.
- Do not touch this product with wet hands.
- Do not disassemble, repair or alter lamp.
- Designed for outdoor applications only.
- Suitable for wet locations.
- The luminaires shall be grounded.
- Be careful not to touch the lamp pins to the metal housing when installing.
- This Device is not intended for use with emergency exits or emergency lights.

## INSTALLATION INSTRUCTIONS

### Mounting the Cross Bar


1. Make sure the power is turned off at main fuse/breaker.
2. Mount crossbar (A) to junction box using screws provided (D).
3. Ensure the threaded mounting tube (B) is screwed into the crossbar with the threads showing on the backside of the crossbar.

### Wiring Your Fixture


1. Connect the black house power wire (hot) to the black lamp fixture wire and secure with a wire connector (C). (Figure 2).
2. Connect the white house power wire (neutral) to the white lamp fixture wire and secure with a wire connector (C). (Figure 2).
3. Connect the copper lamp ground wire to an appropriate supply ground or a grounded junction box and secure with a wire connector (C). (Figure 2).

#### Note:


If fixture is mounted to a non-ferrous box, secure copper lamp ground wire to ground screw (labeled GND) on the crossbar (A) as shown:

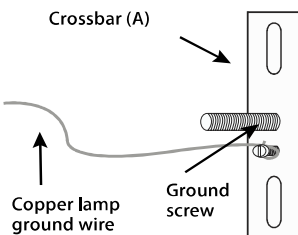

**Figure 1**

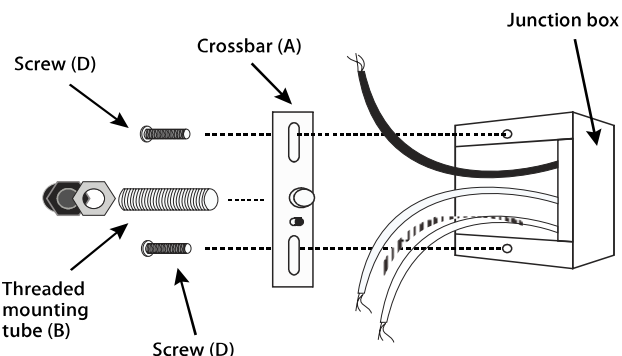

**Figure 2**

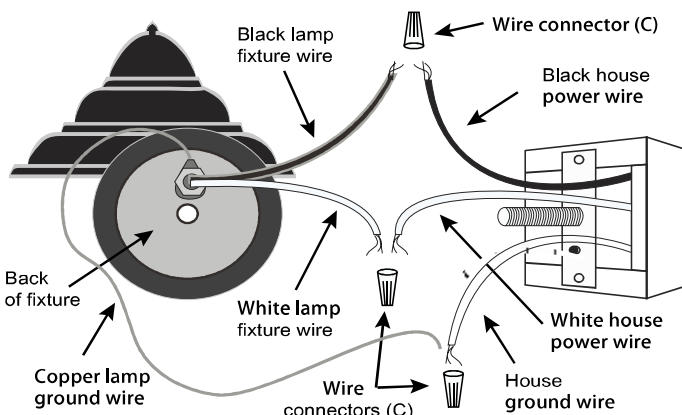


\*Product may vary from illustrations depicted in the provided guide. Please proceed with caution. Installation by a qualified Electrician is recommended.



### Questions?

For customer service please call us at 1-888-743-5766  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

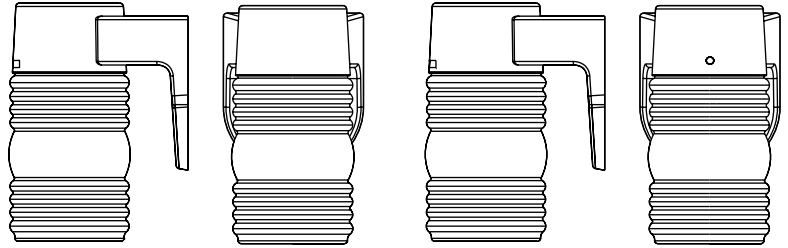

### WARNINGS

- Risk of fire / electrical shock
- LED Fixture installation requires knowledge of luminaire electrical systems.
- Risk of electric shock – disconnect power at source before installation
- Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.
- If lamp or luminaire exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove lamp and contact us. For more information please visit [www.eurilighting.com](http://www.eurilighting.com) or call our toll-free number 1-888-743-5766.

### CAUTIONS


- Do not look directly at the operating LED Module.
- Do not touch this product with wet hands.
- Do not disassemble, repair or alter lamp.
- Designed for outdoor applications only.
- Suitable for wet locations.
- The luminaires shall be g rounded.
- Be careful not to touch the lamp pins to the metal housing when installing.
- This Device is not intended for use with emergency exits or emergency lights.

### INSTALLATION INSTRUCTIONS (continued)


4. After all wires are secure, align the threaded mounting tube (B) with the hole on the back of the fixture. Attach the fixture using the threaded mounting tube cap nut (B). (Figure 3).
5. To help maintain a weather-resistant seal, add silicone caulk where the back of the fixture meets the wall surface.

### Installing the LED Bulb

1. Line up the two pins on the base of the bulb with the two holes in the mounting socket.
2. Once in place, grasp the base of the bulb and twist until the bulb clicks into place.
3. Secure the lens to the fixture using the four mounting screws located underneath the top cap of the fixture.

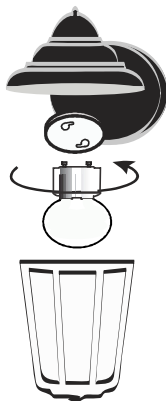

**Figure 3**

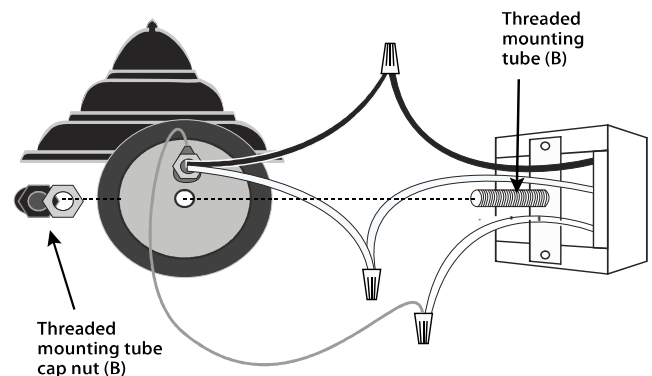

\*Product may vary from illustrations depicted in the provided guide. Please proceed with caution. Installation by a qualified Electrician is recommended.