


Applications


Industrial Machinery
Robotics
Commercial Wiring
Low Voltage Control System
Solar Industry

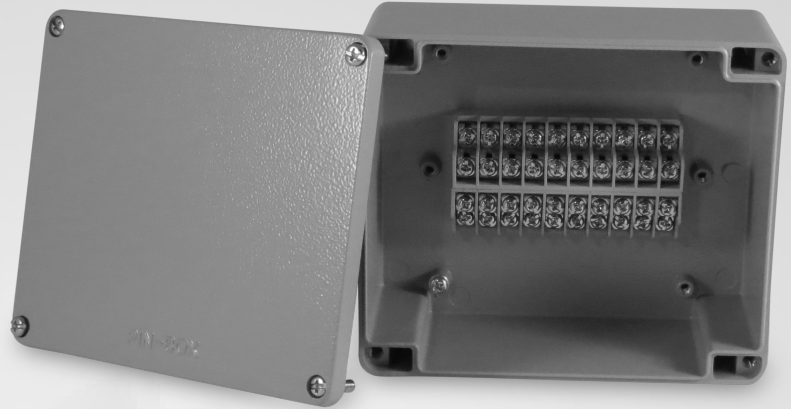

Specifications


Mechanical

Length: 4.921 in (125 mm)
Width: 5.826 in (148 mm)
Height: 2.440 in (62 mm)
Weight: 1.54 lbs (699 g)
Material: Cast Aluminum
Base & Cover
Connection Capacity:
14 - 20 AWG(0.5 - 2.5mm²)
Neoprene Gasket In Cover

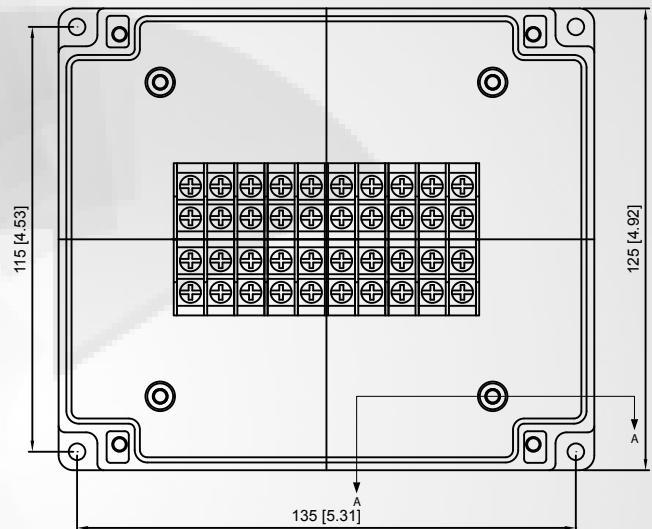

Electrical

Input Current: 15 Ampers
Rated Frequency: 60 Hz
Rated Input Voltage: 120 Volts
#6 Screw Terminal
Terminations: 40 / Circuits: 20

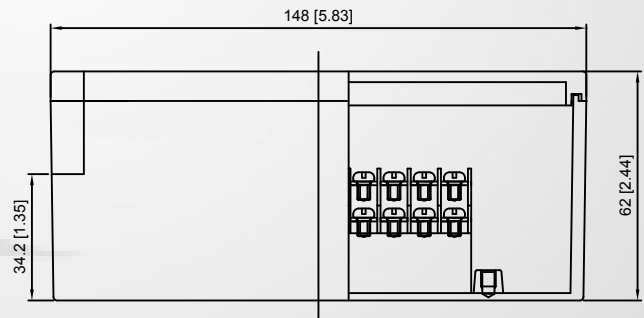

SECTION A - A
SHOWN WITH COVER

Safety

Certifying Agency: TUV-SUD
Countries: Canada, USA
Standards: UL 508A
Ingress protection: IP67

Compatible Accessory



SG-BB-10 (Red)