

## Applications

Industrial Machinery  
Robotics  
Commercial Wiring  
Low Voltage Control System  
Solar Industry

## Specifications

### Mechanical



Length: 4.921 in (125 mm)  
Width: 7.480 in (190 mm)  
Height: 3.149 in (80 mm)  
Weight: 2.87 lbs (1300 g)  
Material: Cast Aluminum  
Base & Cover  
Connection Capacity:  
14 - 20 AWG(0.5 - 2.5mm<sup>2</sup>)  
Neoprene Gasket In Cover

### Electrical

Input Current: 15 Ampers  
Rated Frequency: 60 Hz  
Rated Input Voltage: 120 Volts  
#6 Screw Terminal  
Terminations: 60 / Circuits: 30

### Safety

Certifying Agency: TUV-SUD  
Countries: Canada, USA  
Standards: UL 508A  
Ingress protection: IP67

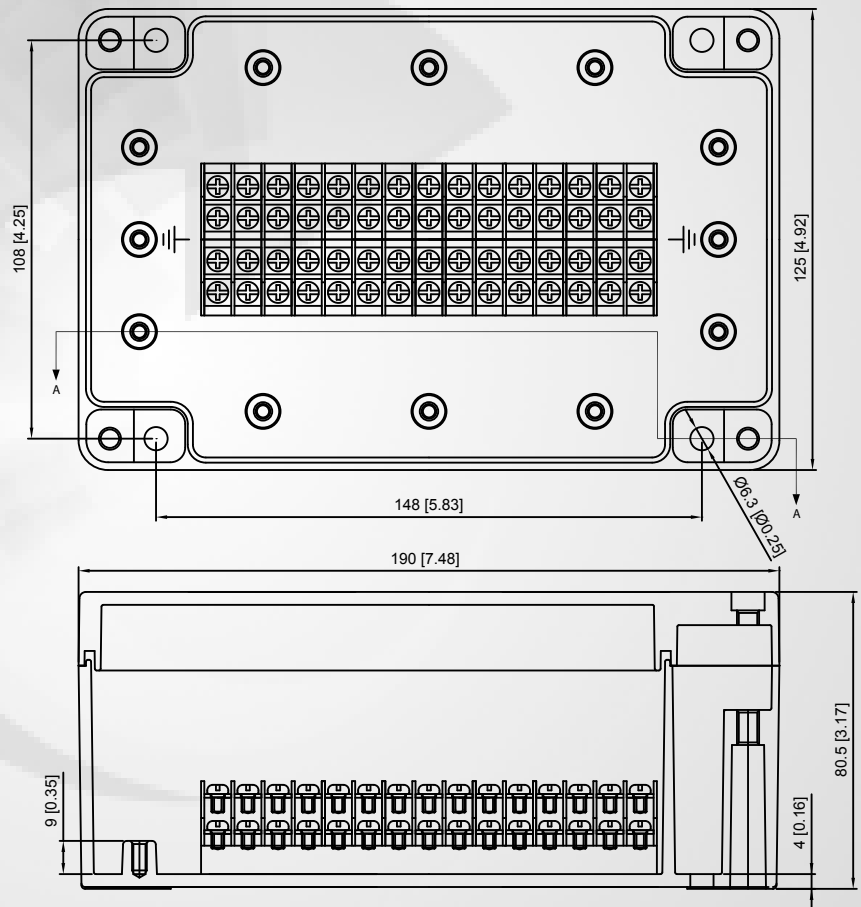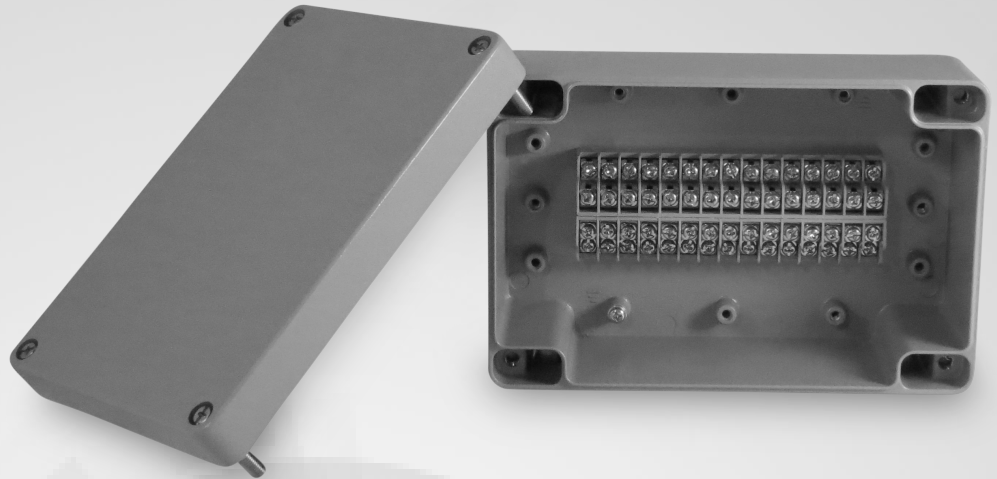

SECTION A - A  
SHOWN WITH COVER

## Compatible Accessory



SG-BB-10 (Red)