

Applications

- Industrial Machinery
- Robotics
- Commercial Wiring
- Low Voltage Control System
- Solar Industry

Specifications

Mechanical




- Length: 2.401 in (61 mm)
- Width: 2.795 in (71 mm)
- Height: 1.889 in (48 mm)
- Weight: 0.55 lb (249 g)
- Material: Cast Aluminum
- Base & Cover
- Connection Capacity:
14 - 20 AWG(0.5 - 2.5mm²)
- Neoprene Gasket In Cover

Electrical

- Input Current: 15 Amperes
- Rated Frequency: 60 Hz
- Rated Input Voltage: 120 Volts
- #6 Screw Terminal
- Terminations: 8 / Circuits: 4

Safety

- Certifying Agency: TUV-SUD
- Countries: Canada, USA
- Standards: UL 508A
- Ingress protection: IP67

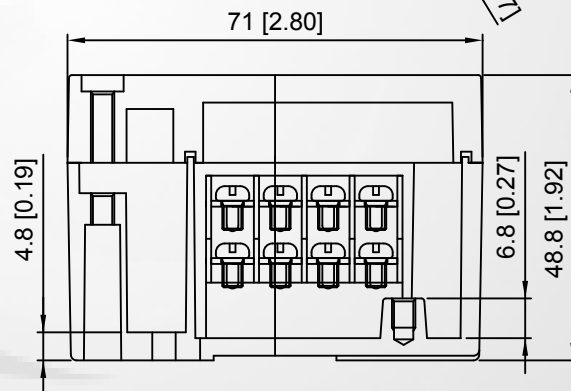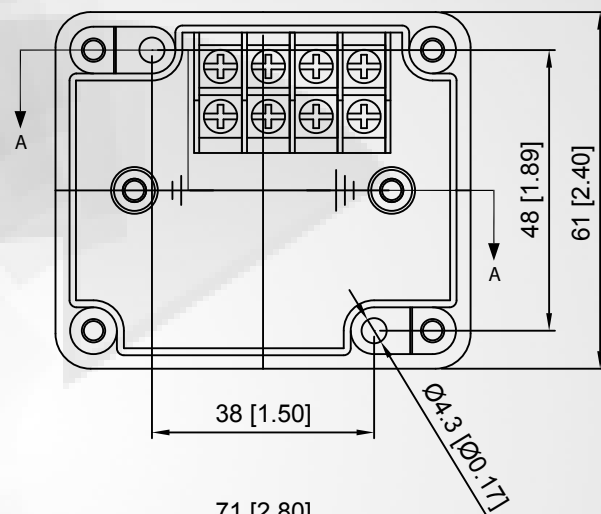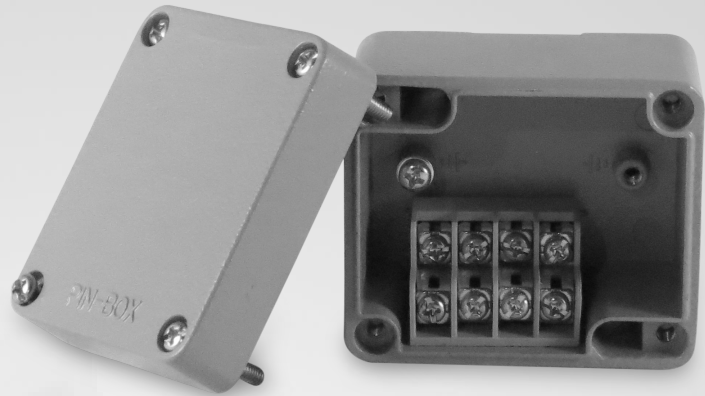

SECTION A - A
SHOWN WITH COVER

Compatible Accessory



SG-BB-10 (Red)