

SCREW-IN RETROFITS



A21/23 HIGH OUTPUT



safe for use ->
in enclosed
fixtures

- > Frosted design to reduce glare.
- > 360° light output for optimal performance.
- > Available in 3000K, 4000K & 5000K
- > Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- > Engineered to work efficiently in enclosed fixtures & damp environments.
- > Protected against insects & dust.
- > 8017-G2 dimmable model available.



ALSO WORKS
ON 208V & 240V



INSTALL
METHOD



MEDIUM +
MOGUL BASE



VERTICAL
MOUNTING



CRI



OPERATING
TEMP



ENCLOSED
FIXTURES



50,000hrs
RATED LIFE



INGRESS
PROTECTION

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR (K)*	BASE
LED-8015E50-G2	844006035983	70W	14W	1960	5000K	E26
LED-8017E50-G2-DIM	844006052232	100W	20W	2660	5000K	E26

* additional color temperatures shown on page 2




Available from Major Electronix | sales@majorelectronix.com | 800-966-2345 |
www.productsforautomation.com

11.27.23 Information is subject to change without notice.



A21/23 HIGH OUTPUT

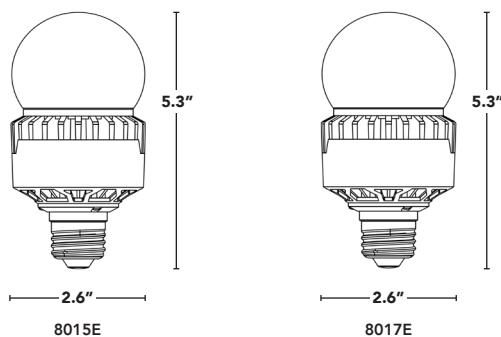

PART #	UPC	REPLACES (INC)	REPLACES (HID)	WATTAGE	LUMENS	CCT	BASE	ENERGY STAR	DLC CODES
LED-8015E30-G2	844006035969	100W	70W	14W	1792	3000K	E26	✓	N/A
LED-8015E40-G2	844006035976	100W	70W	14W	1918	4000K	E26	✓	N/A
LED-8015E50-G2	844006035983	100W	70W	14W	1960	5000K	E26	✓	N/A
LED-8017E30-G2-DIM	844006052218	150W	100W	20W	2620	3000K	E26	✓	N/A
LED-8017E40-G2-DIM	844006052225	150W	100W	20W	2720	4000K	E26	✓	N/A
LED-8017E50-G2-DIM	844006052232	150W	150W	20W	2740	5000K	E26	✓	N/A