



LINEAR LED STRIP FIXTURE



flexCOLOR switch
on each unit



- > Ability to daisy chain multiple fixtures together.
- > OCC option comes with an integrated microwave sensor.
- > Two installation options: suspended & surface mounted.
- > flexCOLOR allows for a reduction in stocked skus.
- > Great for schools, hospitals, grocery stores, offices & warehouses.
- > Rated for damp environments.

flexCOLOR

choose from 3 different color temperatures

flexCONTROL

order without controls, with basic sensor, or advanced Bluetooth mesh control



ALSO WORKS ON 208V & 240V



SENSOR READY 12V AUX



BEAM ANGLE



OCC



OPTIONAL EMG BATTERY BACKUP



CRI



EFFICACY



-4°F to 113°F OPERATING TEMP



50,000hrs RATED LIFE



PART #	UPC	WATTAGE	LUMENS	FLEXCOLOR	DLC CODE LINEAR AMBIENT	DLC CODE STAIRWELL
RP-B-LS-2FT-25L-840-FC	844006061258	20W	2670	3500K/4000K/5000K	PGUXC6L5	PO0C7Y78
RP-B-LS-2FT-25L-840-FC-OCC*	844006061265	20W	2670	3500K/4000K/5000K	PGUXC6L5	PO0C7Y78
RP-B-LS-4FT-40L-840-FC	844006061319	32W	4250	3500K/4000K/5000K	PIP65N0N	P6GRIQ3D
RP-B-LS-4FT-40L-840-FC-OCC*	844006061326	32W	4250	3500K/4000K/5000K	PIP65N0N	P6GRIQ3D

* Microwave occupancy sensor






LINEAR LED STRIP FIXTURE

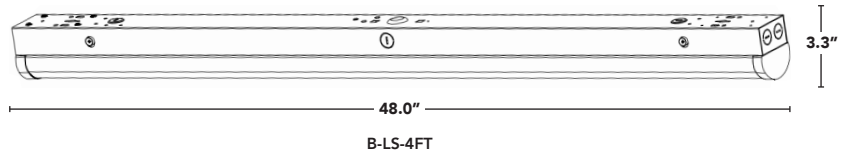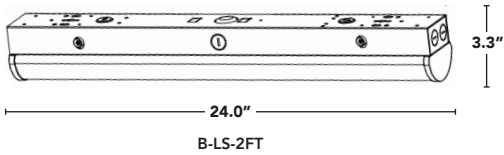

-> parts & accessories

SURFACE/CEILING MOUNT CONTINUOUS RUN BRACKETS


Use the surface/ceiling mount continuous run brackets to create strong and straight junctions between two fixtures. Continuous run kits include: in-line Bracket, AC wiring, wire nuts.

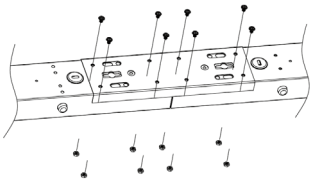

PART #	UPC	DLC CODE STAIRWELL
RP-B-LS-CR-SM-2FT	844006061432	2FT CONTINUOUS RUN SURFACE MOUNT BRACKETS
RP-B-LS-CR-SM-4FT	844006061449	4FT CONTINUOUS RUN SURFACE MOUNT BRACKETS

SUSPENDED MOUNT CONTINUOUS RUN BRACKETS


Use the suspended mount continuous run brackets to create strong and straight junctions between two suspended fixtures. Continuous run suspended kits include: 4ft aircraft cable (2x), ceiling anchors, in-line Bracket, AC wiring, wire nuts.

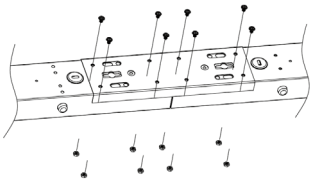

PART #	UPC	DLC CODE STAIRWELL
RP-B-LS-CR-SPND KIT-2	844006061463	2FT CONTINUOUS RUN SUSPENDED MOUNT BRACKETS
RP-B-LS-CR-SPND KIT-4	844006061470	4FT CONTINUOUS RUN SUSPENDED MOUNT BRACKETS

SUSPENDED KIT FOR SINGLE FIXTURE

Use the single fixture suspended kit to suspend one fixture from the ceiling. Continuous run suspended kits include: 4ft aircraft cable (2x), ceiling anchors, in-line Bracket, AC wiring, wire nuts.

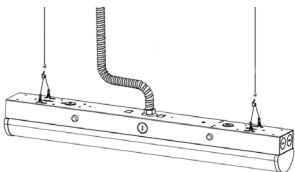

PART #	UPC	DLC CODE STAIRWELL
RP-B-LS-SPND KIT-SINGLE-2-4	844006061418	2FT/4FT SUSPENDED KIT FOR SINGLE FIXTURE

-> RP-B-LS is also compatible with the following sensors

- Standard Occupancy Sensor (-OCC)
- Limited Range Sensor (-OCCLR)
- Simple Grouping Sensor (-OCCRF)