

FIXTURES




FULL CUTOFF WALL PACK



- > Easily adjust the color temperature via a switch on the unit.
- > UV resistant lens and coating.
- > Die-cast aluminum housing makes the unit suitable for wet locations.
- > Built-in photocell.
- > Includes level indicator to ensure proper alignment when installed.

switch ↑
between
color
temps

flexCOLOR

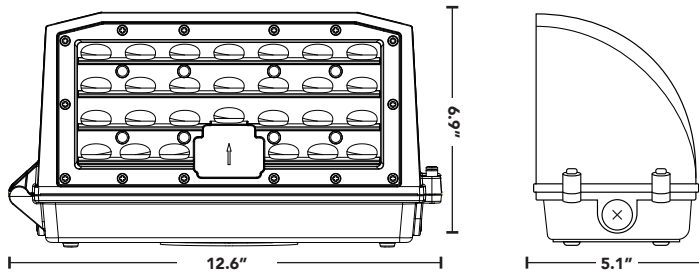

120/
277V
ALSO WORKS
ON 208V & 240V



0-10V DIM



CRI

IP65
RATED
INGRESS
PROTECTION

-40°F to 104°F
OPERATING
TEMP

L70
50,000hrs
RATED LIFE

PART #	REPLACES	WATTAGE	LUMENS	FLEXCOLOR	DLC CODES
RP-B-WPC-48L-FC	175W HID	40W	4800	3000K/4000K/5000K	POQOW51A
RP-B-WPC-72L-FC	250W HID	60W	7200	3000K/4000K/5000K	PAOQQRX8
RP-B-WPC-96L-FC	320W HID	80W	9600	3000K/4000K/5000K	PO6IXKG6



Available from Major Electronix | sales@majorelectronix.com |
800-966-2345 | www.productsforautomation.com

02.17.22 Information is subject to change without notice.


Light Efficient Design