

## Applications

Industrial Machinery  
Robotics  
Commercial Wiring  
Low Voltage Control System  
Solar Industry

## Specifications

### Mechanical



Length: 6.299 in (160 mm)  
Width: 10.236 in (260 mm)  
Height: 3.543 in (90 mm)  
Weight: 5.51 lbs (2500 g)  
Material: Cast Aluminum  
Base & Cover  
Connection Capacity:  
14 - 20 AWG (0.5 - 2.5 mm<sup>2</sup>)  
Neoprene Gasket In Cover

### Electrical

Input Current: 15 Ampers  
Rated Frequency: 60 Hz  
Rated Input Voltage: 120 Volts  
#6 Screw Terminal  
Terminations: 80 / Circuits: 40

### Safety

Certifying Agency: TUV-SUD  
Countries: Canada, USA  
Standards: UL 508A  
Ingress protection: IP67

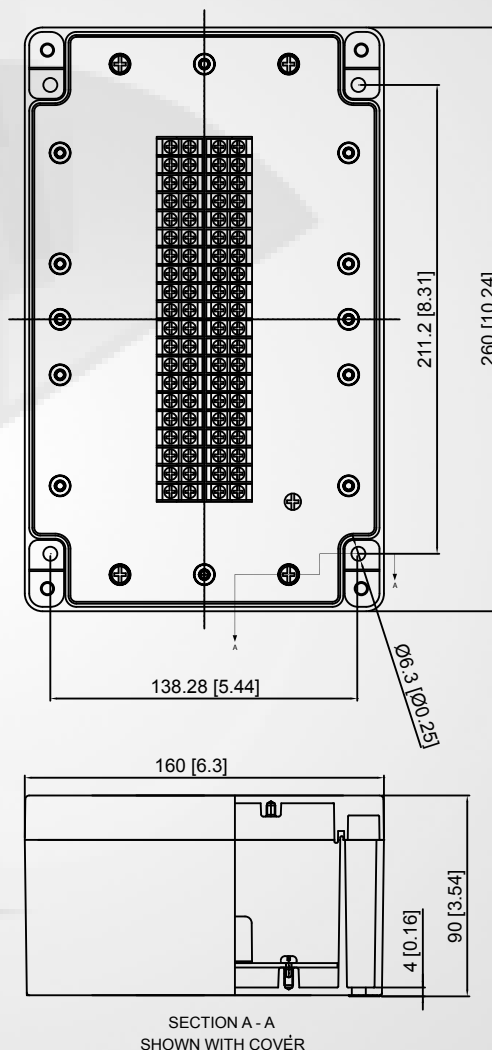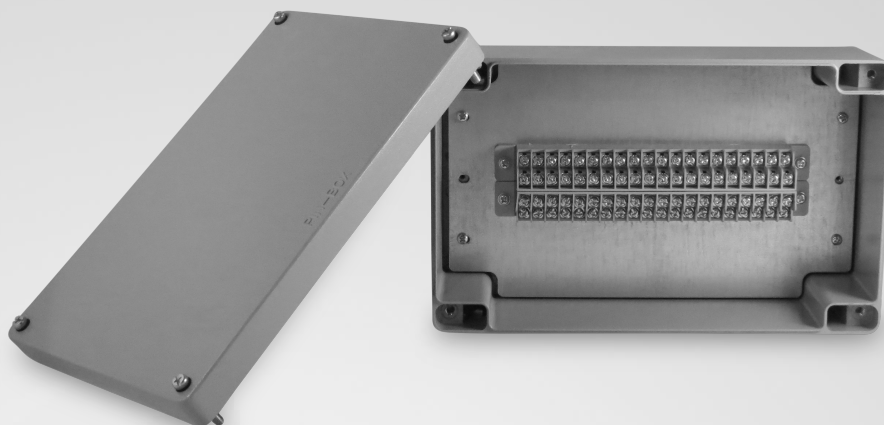

## Compatible Accessory



SG-BB-10 (Red)