

Applications

- Industrial Machinery
- Robotics
- Commercial Wiring
- Low Voltage Control System
- Solar Industry

Specifications

Mechanical



- Length: 4.921 in (125 mm)
- Width: 7.480 in (190 mm)
- Height: 2.559 in (65 mm)
- Weight: 1.16 lb (527 g)
- Material: ABS Base & Cover
- Connection Capacity:
14 - 20 AWG(0.5 - 2.5mm²)
- Wire Entry: Center Marks for Drilling
- Entry Opening: 13/16 in (20mm)
- Trade Size: 1/2 NPT
- Neoprene Gasket In Cover
- Mounting Hardware:
(2) PH - M4 x 30 with Hex Nut

Electrical

- Input Current: 15 Amperes
- Rated Frequency: 60 Hz
- Rated Input Voltage: 120 Volts
- #6 Screw Terminal
- Terminations: 60 / Circuits: 30

Safety

- Certifying Agency: TUV-SUD
- Countries: Canada, USA
- Standards: UL 508A
- Ingress protection: IP65*
- *When IP65 or Higher Rated Cable Gland is used

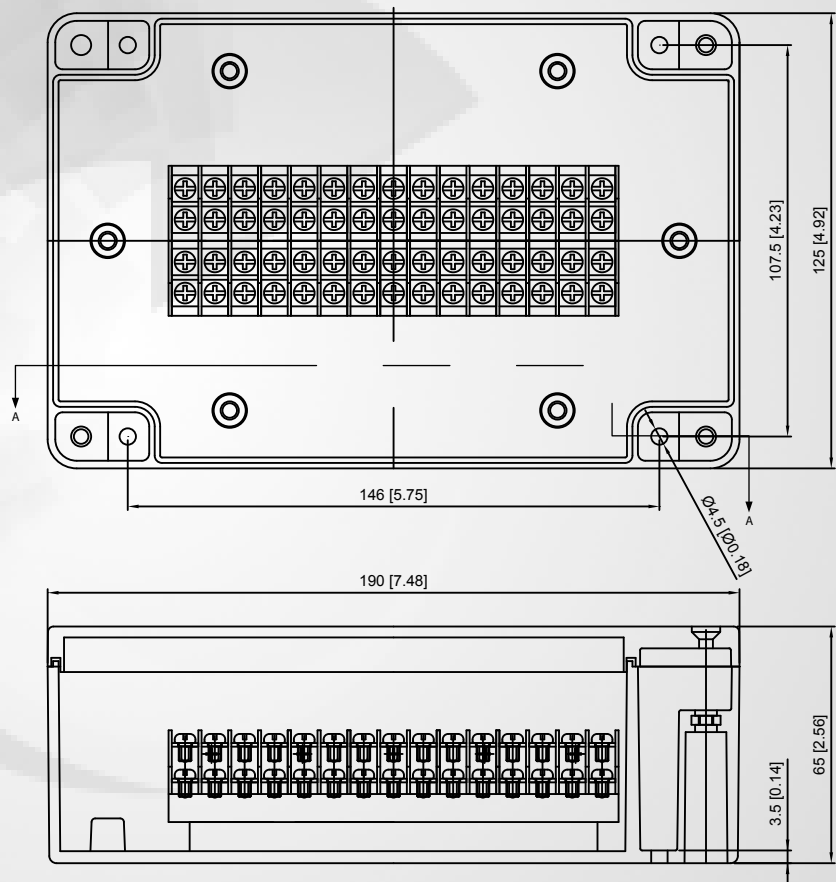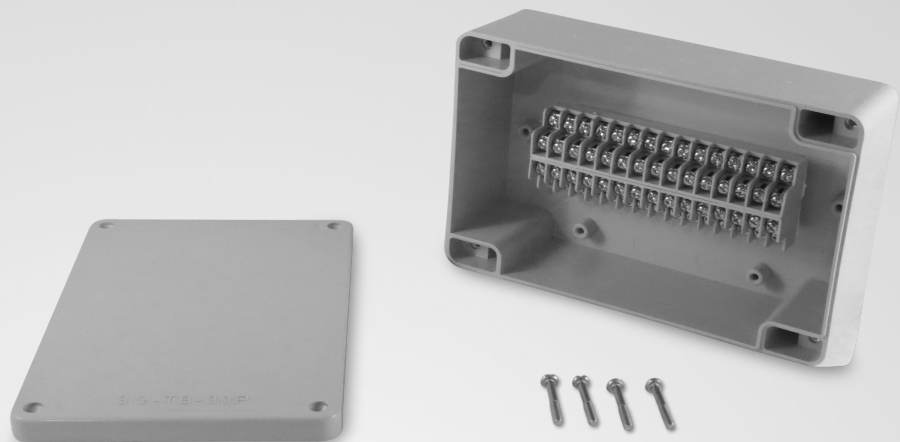

SECTION A - A
SHOWN WITH COVER

Compatible Accessory



SG-BB-10 (Red)