


PRODUCT DESCRIPTION:

The sleek design of the Bright1000 LED panel lights utilize both top and side-fired led chipset arrangements allowing for a more uniform distribution of light. With the thickness of 3/8" (1.8" overall with driver) and built-in top-mounted attachments for suspension, these lightweight fixtures reduce installation time. These fixtures are a great replacement for lighting in offices, restaurants, and retail stores. The LED driver produces it's own 10vdc power supply, which removes the need for an external power supply to power the dimming circuit.

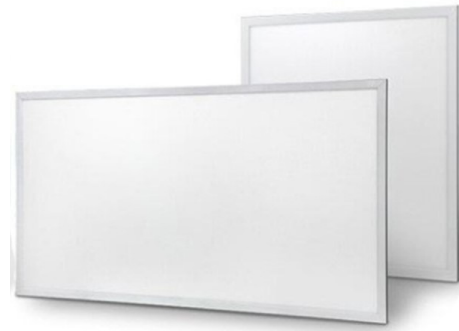

ORDERING PART NUMBER: BPL22-40-40

ANNUAL ENERGY SAVINGS = \$8.42

Savings based on replacing 2L T12 - 10 hours/day, 260 days/year, at \$0.12/KWH


TECHNICAL DATA:

	Specifications	Model Details
General	Model Number	BPL22
	LED Power	40W
	Fluorescent Equivalent	2 Tube 2' 32W T8
	Driver	Lifud
	LED Chip	Hongli or Ruifeng
Performance	Lumens Delivered (lm)	4,400
	Efficacy (lm/W)	110 lm/W
	Beam Angle	120°
	Color Rendering Index (CRI)	> 83
	CCT	4000K
Electrical	Lumen Maintenance (L70)	> 50,000 Hours
	Power Consumption	40W
	Power Factor	> 95%
	Input Voltage (V)	100-277V
Physical	Dimmable	0-10V Dimming
	Mounting	Suspension Kit
	Weight	7.3 lbs
	Housing	Aluminum Frame
	Lens	PS, LGP
	Dimensions	603mm x 603x 10 mm
	Operating Temperature	-25°C ~ 45°C
Application	Humidity	NA
	Certification	DLC, ETL, cETL
	Material Usage	RoHS Compliant
	IP Rating	IP 40
	Warranty	5 Years

Photometric Data

Photometry Curve

AVERAGE BEAM ANGLE (50%): 120 DEG

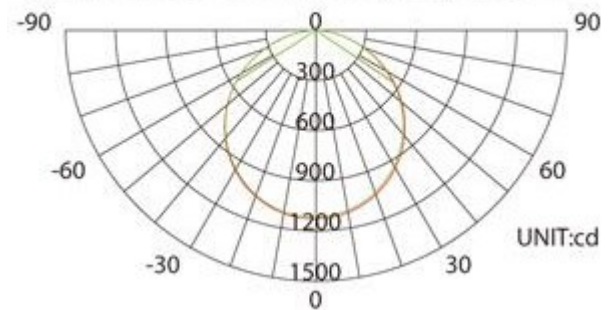

Dimensional Data

