



Model No.:	SPD-277P-10KA-EC1
Product Type	SPD Type 5
MCOV:	320
Mains Voltage :	120-277*
Frequency	50/60 Hz
Status	Production


Mains Voltage (VAC)		120-277*
Maximum Continuous Operating Voltage (VAC)		320
Max Peak Current(8/20us)(KA)	In	5
	I _{max}	10
Combination Wave (1.2/50μs-8/20μs)(KV/KA)	V _n	10
	V _{max}	20
Measured Limited Voltage (MLV)(V)	L-N	1230
	L-G	1400
	N-G	1420
Case Physical Parameters (mm)	Length (L)	90±5
	Width (W)	26±3
	Height (H)	17±3
	Mounting hole (M)	Ø6±1
Operation Temperature (°C)		-40 ~ +85
IP Rating:		IP65

14 AWG Lead wire length (mm)	Black (Strip 10mm Tin Plated)	152±10
	White (Strip 10mm Tin Plated)	152±10
	Green (Strip 10mm Tin Plated)	152±15

* CAUTION: For use only with LED Drivers/Ballasts with dedicated input voltage 277VAC, or with universal input voltage ranges from 120-277VAC

Overview:

- Protects against surges according to UL1449 and IEEE C62.41.2 C
- Can be used with LED Driver, e-HID Ballast, Electronic Fluorescent Ballast, Induction Generator

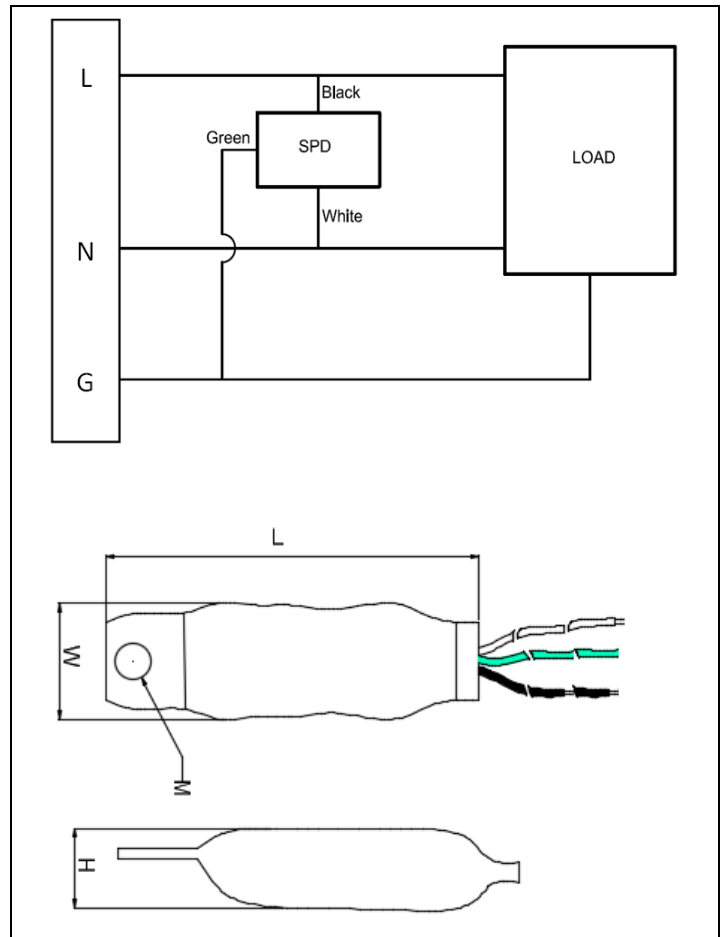

Document No.:	PS_SPD277P10KAEC1_N_L_M01
Date:	2021-01-08 (yyyy-mm-dd)