

SCREW-IN
RETROFITS



SUPERFLEX BOLLARD/POST TOPS




top LED's



← SUPERflex

switch
between
wattages
& color
temps

35W 45W 60W



3K 4K 5K



- LED-8029: switch between 12W, 18W & 24W replacing up to 150W HID.
- LED-8024: switch between 35W, 45W & 60W replacing up to 320W HID.
- LED-8027: switch between 80W, 100W & 110W replacing up to 400W HID.
- Change color temperatures with a flip of a switch (3000K, 4000K, 5000K).
- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Lamps dim to 50-70% by adjusting the wattage switch on the side of the lamp only.
- Field adjustable light output.



**120/
277V**
ALSO WORKS
ON 208V & 240V

ULTYPE B
BALLAST
BYPASS
INSTALL
METHOD

MEDIUM +
MOGUL BASE

ACTIVE
COOLING

DIMMABLE

OPERATING
TEMP
-40°F TO 122°F

L70
50,000hrs
RATED LIFE

6kA
SURGE
PROTECTION

80+
CRI

| PART # | UPC | REPLACES | WATTAGE | LUMENS | FLEXCOLOR | BASE |
|------------------------|--------------|----------------|---------------|-------------|-------------------|------|
| LED-8029E345-A-FW | 84400606067 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | E26 |
| LED-8029M345-A-FW | 84400606068 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | EX39 |
| LED-8024E345-G7-FW | 844006060718 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | E26 |
| LED-8024M345-G7-FW | 844006060725 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | EX39 |
| LED-8027M345-G7-FW | 844006060756 | 320W-400W | 80W-100W-110W | 11370-15730 | 3000K/4000K/5000K | EX39 |
| LED-8027M345-G7-FW-HV* | 844006077129 | 320W-400W | 80W-100W-110W | 11370-15730 | 3000K/4000K/5000K | EX39 |

* 8027-HV runs on 277-480V




Available from Major Electronix | sales@majorelectronix.com |
800-966-2345 | www.productsforautomation.com

08.11.22 Information is subject to change without notice.



SUPERFLEX BOLLARD/POST TOPS

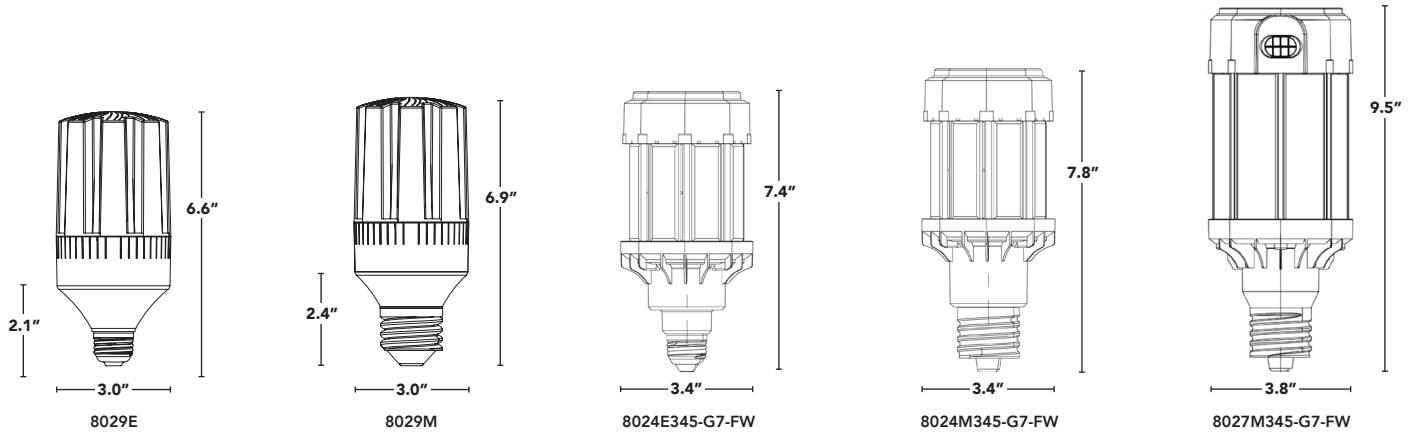

| PART # | UPC | REPLACES | WATTAGE | LUMENS | FLEXCOLOR | BASE | DLC CODES |
|------------------------|--------------|----------------|---------------|-------------|-------------------|------|-----------|
| LED-8029E345-A-FW | 84400606067 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | E26 | N/A |
| LED-8029M345-A-FW | 84400606068 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | EX39 | PVPFGTKS |
| LED-8024E345-G7-FW | 844006060718 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | E26 | N/A |
| LED-8024M345-G7-FW | 844006060725 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | EX39 | PE8R4NVO |
| LED-8027M345-G7-FW | 844006060756 | 320W-400W | 80W-100W-110W | 11370-15730 | 3000K/4000K/5000K | EX39 | PMXF5D5C |
| LED-8027M345-G7-FW-HV* | 844006077129 | 320W-400W | 80W-100W-110W | 11370-15730 | 3000K/4000K/5000K | EX39 | N/A |

* 8027-HV runs on 277-480V

🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

| PART # | UPC | REPLACES | WATTAGE | LUMENS | FLEXCOLOR | BASE | DLC CODES |
|---------------------|--------------|----------------|---------------|-------------|-------------------|------|-----------|
| LED-8029E345C-A-FW | 84400606069 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | E26 | N/A |
| LED-8029M345C-A-FW | 84400606070 | 70W-100W-150W | 12W-18W-24W | 1550-3360 | 3000K/4000K/5000K | EX39 | P55Z8FTK |
| LED-8024E345C-G7-FW | 844006060732 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | E26 | N/A |
| LED-8024M345C-G7-FW | 844006060749 | 175W-250W-320W | 35W-45W-60W | 5140-8870 | 3000K/4000K/5000K | EX39 | P17WDCCW |
| LED-8027M345C-G7-FW | 844006060763 | 320W-400W | 80W-100W-110W | 11370-15730 | 3000K/4000K/5000K | EX39 | POIALL6T |

LED-8029

| WATTAGE | CCT | LUMENS |
|---------|-------|--------|
| 12W | 3000K | 1550 |
| 12W | 4000K | 1610 |
| 12W | 5000K | 1650 |
| 18W | 3000K | 2450 |
| 18W | 4000K | 2560 |
| 18W | 5000K | 2610 |
| 24W | 3000K | 3170 |
| 24W | 4000K | 3330 |
| 24W | 5000K | 3360 |

LED-8024

| WATTAGE | CCT | LUMENS |
|---------|-------|--------|
| 35W | 3000K | 5140 |
| 35W | 4000K | 5290 |
| 35W | 5000K | 5360 |
| 45W | 3000K | 6200 |
| 45W | 4000K | 6510 |
| 45W | 5000K | 6620 |
| 60W | 3000K | 8440 |
| 60W | 4000K | 8790 |
| 60W | 5000K | 8870 |

LED-8027

| WATTAGE | CCT | LUMENS |
|---------|-------|--------|
| 80W | 3000K | 10780 |
| 80W | 4000K | 11290 |
| 80W | 5000K | 11370 |
| 100W | 3000K | 13800 |
| 100W | 4000K | 14270 |
| 100W | 5000K | 14350 |
| 110W | 3000K | 15080 |
| 110W | 4000K | 15690 |
| 110W | 5000K | 15730 |